




FR05

BIOMETRIC TERMINALS

Multiple Recognition Functions



NFC&Card
Face



SPECIFICATION

Screen	5-inch, full-view IPS LCD (Optional touch screen)
Resolution	1280*800
Dimension	200*91.2*17.05mm
Weight	0.35KG (Device only)
Installation Method	Wall mounting
Power Consumption	DC12V
Electromagnetic Radiation	No frequency point exceeds the standard
Static Electricity	4K/8K
Working Humidity	10%-90%
Working Temperature	10-60°C
Power Supply	5W MAX
Protection Level	IP56

HARDWARE

OS	Android 11
CPU	Quad Core 1.9Ghz
RAM	2GB
ROM	16GB

INTERFACE

Serial communication interface	RS232
Relay Out	NC, NO and COM
Wiegand Interface	Support Wiegand 26/34 input/output
Rest Interface	Yes

CAMERA

Pixel (Dual Camera)	2.0M (RGB camera), 1.3M (Infrared camera)
Resolution	RGB+IR
Type	Wide dynamic camera
Aperture	4mm
Focal Length	0-2m
White Balance	Automatic
Wide Dynamic	Automatic

FACE RECOGNITION


Face Capacity	50,000
Face Detection	Support detecting and tracking 5 people at the same time
1:N Face Recognition	Support 1 in 10,000 false recognition rate
1:1 Fingerprint and Face Recognition	Fingerprint module can achieve
Stranger Detection	Support
Recognition Distance	0.5m-4m

OTHERS

Fill light	LED fill light
Card Reader	Support 20,000
Network Module	Support wired, wireless (2.4GHz Wi-Fi), optional 4G
QR Code Scanner (Optional)	Optional QR code scanner



- 1 Dual Camera
- 2 RFID Reader
- 3 Interface
- 4 Speaker

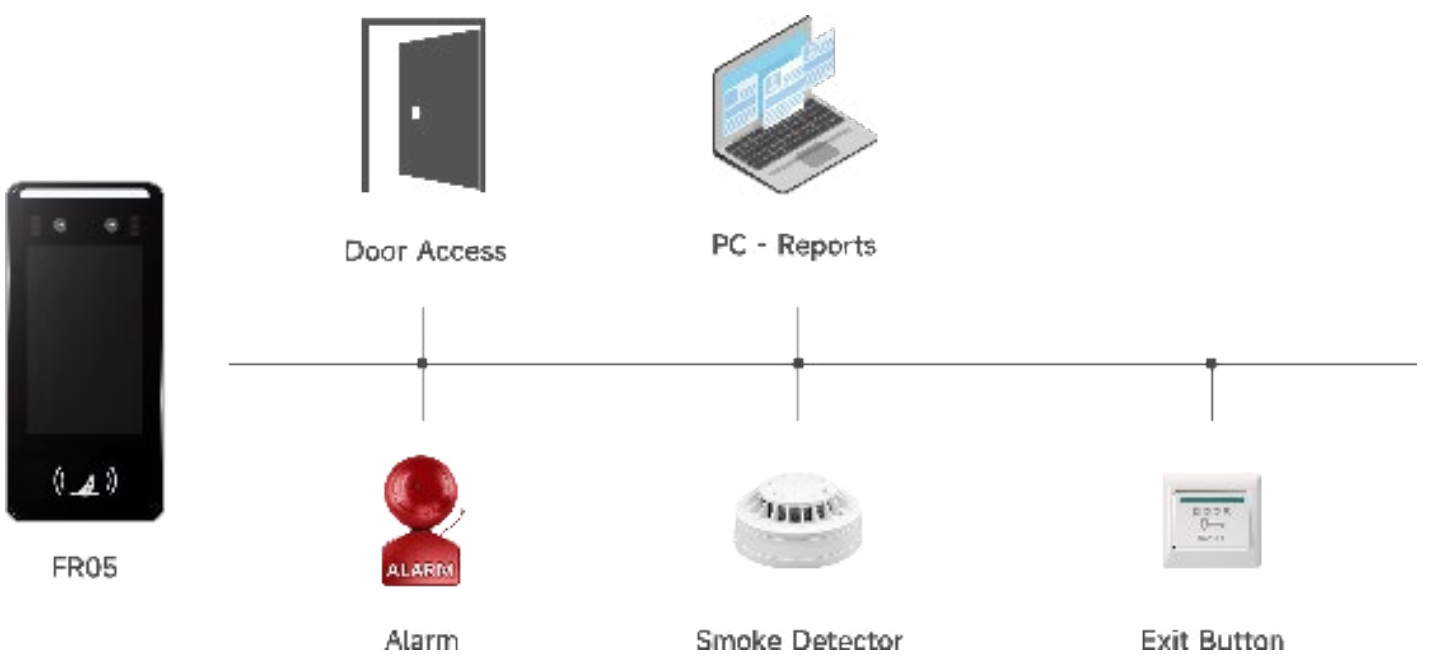

Head-quarter: Chongqing Huifan Technology Co., Ltd.
 D-15, Dongli International Building Longtousi, Yubei District, Chongqing, China.

Branch: Shenzhen BIO Technology Co., Ltd.
 Room 301-305, No.32, Jianlong Industrial Zone, Yanshan, Longgang District, Shenzhen, China.



YouTube