




website: www.hfsecurity.cn

 023 6730 5242

 Dongli International Building D 1313~1316 LongTouSi, Yubei Zone, Chongqing, China

 info@hfctv.com







ENTERPRISE HONOR



HFSP10

Facial recognition & QR code scan
payment terminals



System

Android 7.1

CPU

Conrtex-A17
(Quad core)

Memory

2GBRAM
8GB ROM

Power

Input: AC100-240V/1.7 A
Output: DC12V/4A

WIFI

802.11 b/g/n

Bluetooth

support bluetooth
2.1/3.0/4.0

Micro SD(TF)

Maximum support
64GB

Touch screen

Ten-point capacitive
touch screen

Screen size

10.1 inch
(800*1280)

Dimension

18cmx15.5cmx37cm

Button

Power button
(lock screen)

Speaker

3w

Camera

Without/monocular camera
binocular camera optional

Inteface

USBx2,RJ45 LAN x1,RJ11x1,TF cardx1
Micro USBx1 ,DC-INx1 ,HDMIx1

HFSECURITY SP10 is 10.1 inch payment terminals, can support face, QR code, video, and print function

Details Show



Self-service cash register

SP18



Android 11 Printer Scan code IC card



SP18 Specification

SPECIFICATIONS

Specification

Size	15.6 inches (available 18.5)
Display scale	16:9 (Wide:High)
Panel type	TFT-LCD,LED
LCD display color	16.7M
Displays area	309.14x173.89mm(H×V)
lightness	250cd/m ² (Typ.)
Responsetime	30ms
Contrast	700:1(Typ.)(penetrance)
VisualAngle(horizontal/vertical)	85/85/85/85(Typ.)(CR≥10)(Left/right/top/bottom)
Touch function	10 Point Capacitive touch
Surface respon setime	10ms
Touch method	Finger or capacitive pen
light transmittance	Greater than85%
Resolution	1920x1080@60Hz

Computer

CPU	Dual-coreCortex-A72upto1.8GHz Quad-coreCortex-A53upto1.4GHz
OS	Android 11
RAM	4G
ROM	32G

Printer

Printing method	Thermal label printer
Print span	72MM Effectively print width
Print out rate	80MM/S
Cut paper way	Automatic paper cutting (full/half-cut)
Print paper specifications	40MM-79MM±0.5MM
Print head life	50 kilometre
Paper loading	After loading paper structure, automatic paper

QR scanner

Scan code system	2D/1D
Reading accuracy	≥5mil
Bar codes ensitivity	tilt ±55, deflect ±55 ,and rotate 360
Operating voltage	5VDC±10%(Typicalvalue),less than 190mA (5Vinput) and less than 100mA (10Vinput)
Power supply	DC 12V 7A
Continuous working hours	7×24h
Power	Standby mode 15W (max) ,working mode 48W (max)
Interface	USB*2, LAN*1, DC*1
Operating Temperature	0℃– 40℃
Relative humidity	<80%
Storage Temperature	-20℃— 55℃
Relative humidity	<90%

SP27

Self-service ordering

Suitable for various scenarios

SP27

Mini	Standard	Pro
21.5" (BOE/AUO)	23.8" (BOE/AUO/Samsung)	27" (BOE/AUO/Samsung)
2GB RAM+8GB ROM	2GB RAM+8GB ROM	Optional 4GB RAM+32GB ROM
RK3288 Quad Core 1.8GHz	RK3288 Quad Core 1.8GHz	RK3288/RK3399
745*326.4*90MM	805*346.4*90MM	

OS
Android 7.1

Bluetooth
Bluetooth 4.0

Speaker
Built-in speakers 3W*2
(Dual channel)

WiFi
802.1b/g/n. 2.4GHz

Display
1920*1080

Network
GPRS WIFI

Prot
USB 2.0*4; Micro USB*1;
RJ45*1;Power port

Code Scanner
Support scan 1D/2D bar code

Storage Temperature
-20~55°C

Operating Temperature
0~40°C

Printer
Built-in 80mm thermal printer

Ethernet
Support 10/100M adaptive

Optional:
Facial recognition camera, NFC, ID card recognition,
floor stand, storage tray, 4G network

Restaurant



Shopping mall



Details



Floor stand type



Touch Kiosk HP32 Model



- Operating system**
Android/Windows
- Processor**
J1900/i3/i5/i7
RK3288/RK3399
- Bluetooth**
optional
- Touch screen**
Multi-touch
Smooth handwriting
- Scanner**
Scanner Support 1D,2D
0-100mm decode ranges
- Prin tern**
With automatic cutter
Support 80mm OD paper
roll
- Cash available**
Accepts and
stacks in 3s
Holdup1000ba
nknote
- Working environment**
Working temp:-10~60° C
Storage temp:-20°C~70°C
- Power supply**
Input: AC100~240V
- Tablet**
Optional for self
checkout



Parametres

SPECIFICATIONS

Monitor

Size	32" (or 27")
Display scale	16:9
Type	Capacitive touch LED
Touch response time	5ms
Touch Object	Finger, Pen,

Computer

CPU	Intel Core i3 i5 i7/RockChip
RK3288 System	Windows/Android
RAM	2G/4G/8G
ROM	32G/64G/128GB
Interface	USB*4,RS232*2,RJ45*1
Frequency (H/V)	30~80KHz/60~75Hz
Storage Temperature	-5°C-60°C

Display

Resolution	1920x1080
Brightness	350 cd/m2
Contrast ratio	1200:1
Display area	765mm*459mm
Light transmit ratio	85%
View angle	178°/178°

MoreInfo


Overall dimension	605.4mm(L)*378.3mm(W)*1741.5mm (H)
Net weight	105KG
Power Type	external power adapter
Input voltage	100-240VAC,50-60Hz
Operating temperature	-10~50°C
Storage temperature	-20~60°C
Working humidity	10%~90%
Storage humidity	10%~90%
Protection level	IP56
LED Backlight Life (Min)	30,000hours

Beautiful out looks

Simple and elegant appearance,
slim and beautiful out looks,
as an art of black and white







Details

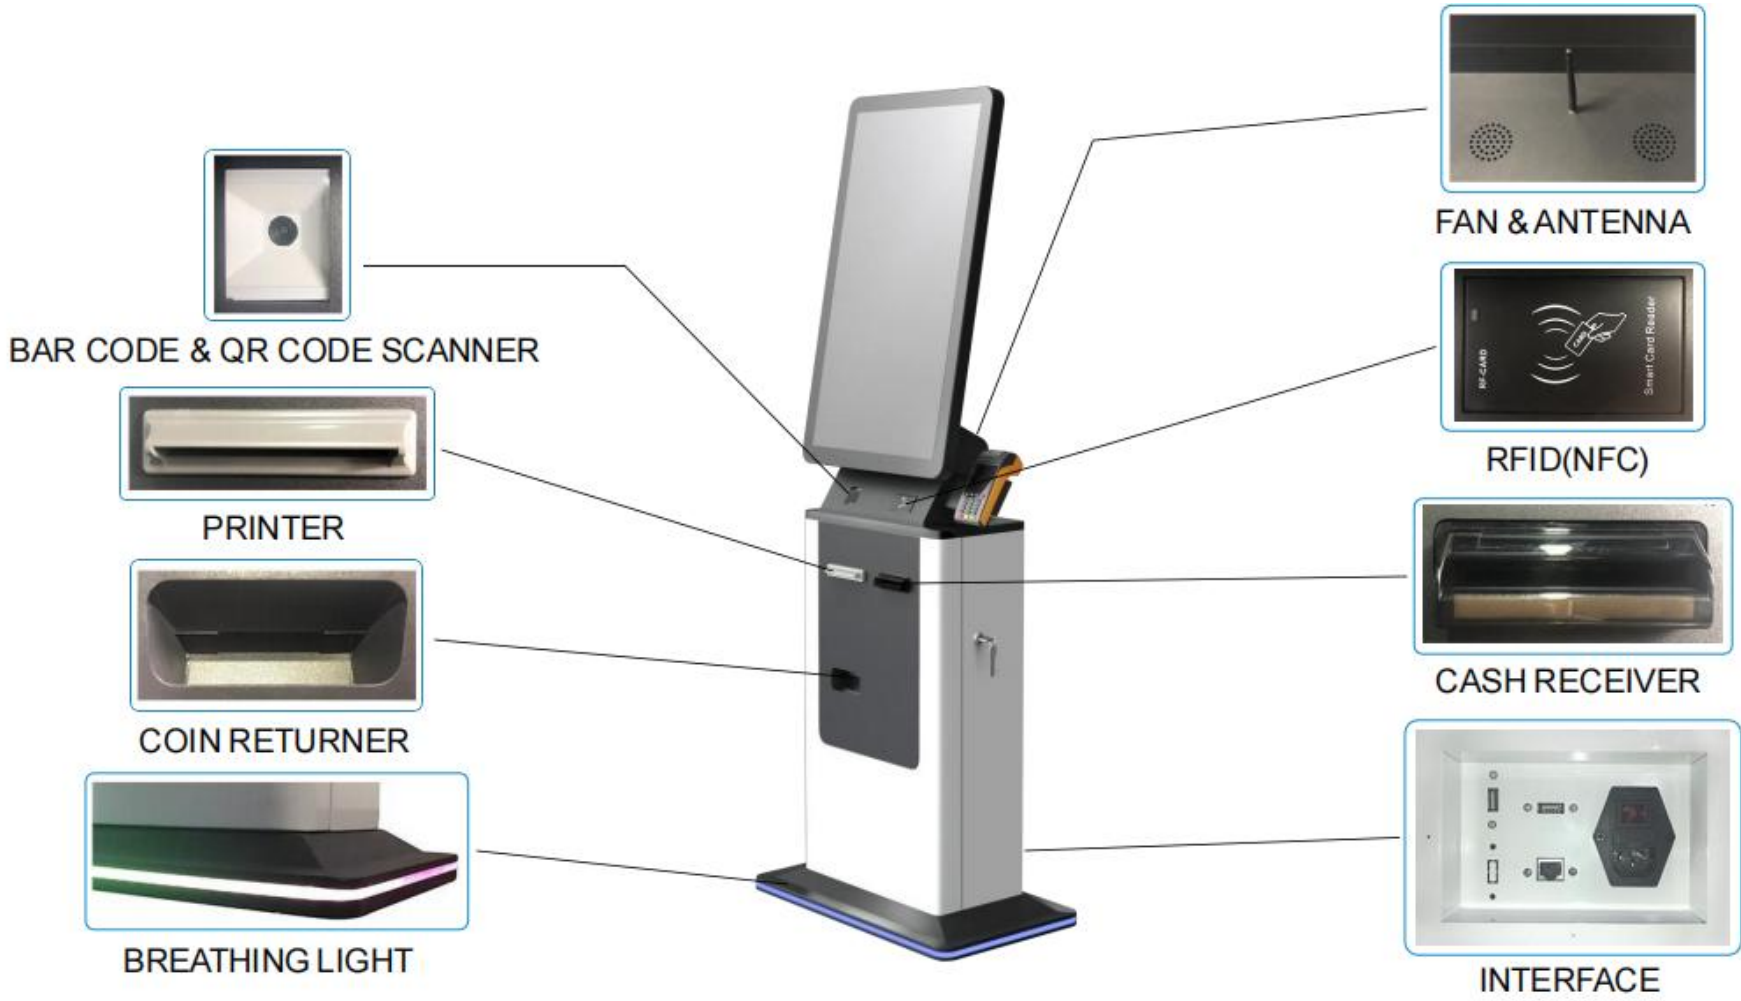

Default Accessories Provided : power cord, WIFI antenna

Details

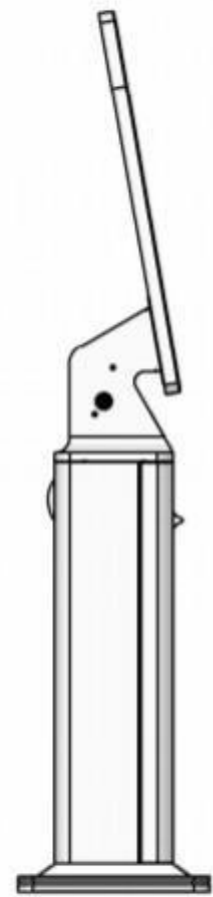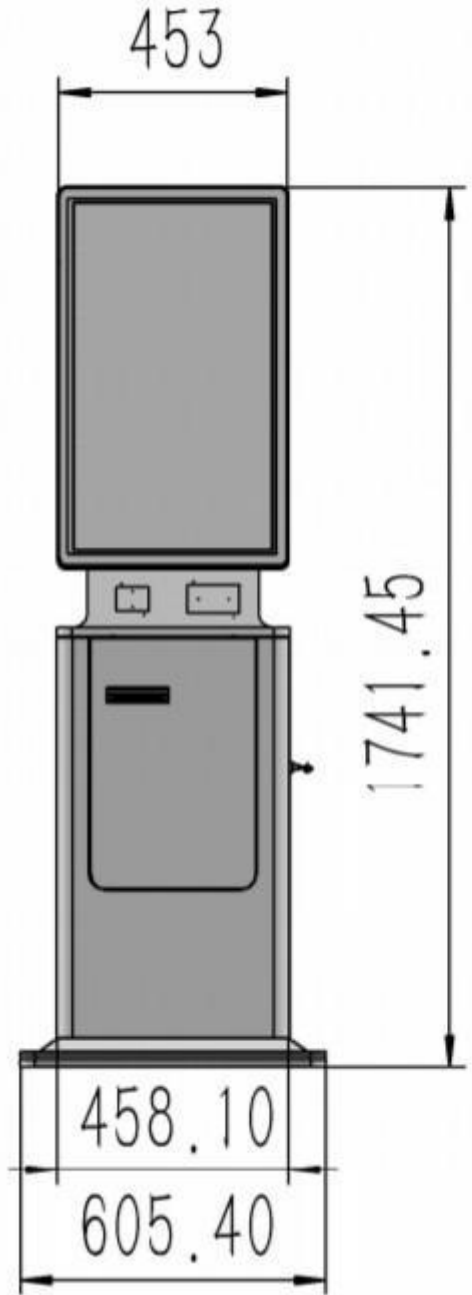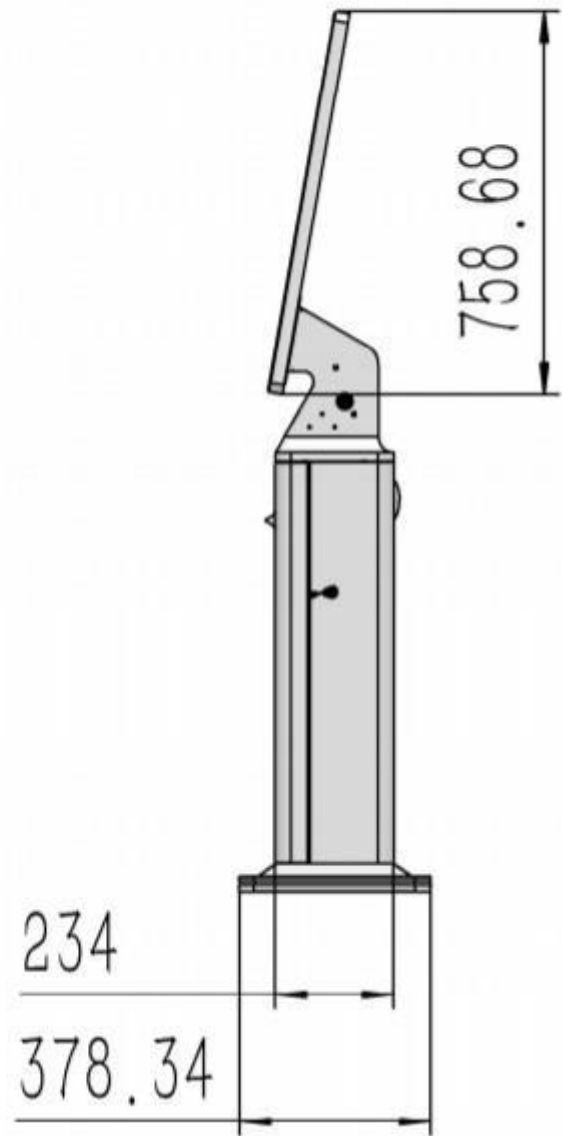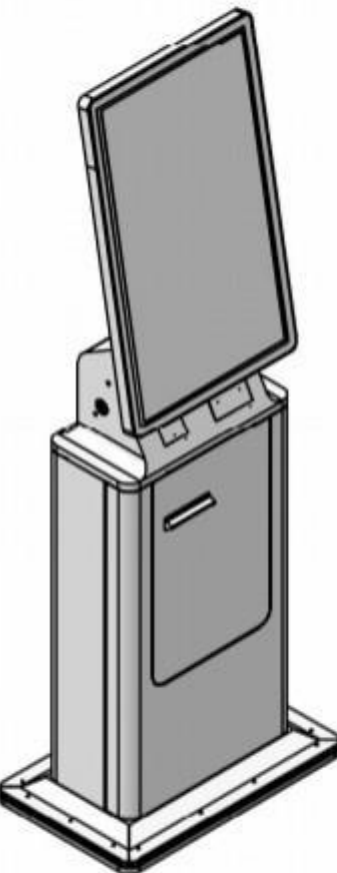

HP32 (Outdoor)



Default Accessories Provided: power cord, WIFI antenna

SPECIFICATIONS

Monitor

Size	32" (or 27")
Display scale	16:9
Type	Capacitive touch LED
Touch response time	5ms
Touch Object	Finger, Pen,

Computer

CPU	Intel Core i3 i5 i7/RockChip RK3288
RK3288 System	Windows/Android
RAM	2G/4G/8G
ROM	32G/64G/128GB SSD
Interface	USB*4,RS232*2,RJ45*1
Frequency (H/V)	30~80KHz/60~75Hz




Display

Resolution	1920x1080
Brightness	1500 cd/m ²
Contrast ratio	1200:1
Display area	765mm*459mm
View angle	178°/178°

MoreInfo

Overall dimension	640mm(L)*340mm(W)*1895mm (H)
Net weight	75KG
Power Type	external power adapter
Input voltage	100-240VAC,50-60Hz
Operating temperature	-10~50°C
Storage temperature	-20~60°C
Working humidity	10%~90%
Storage humidity	10%~90%
Protection level	IP65

Details

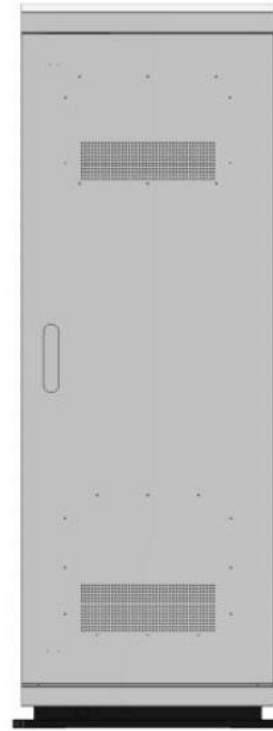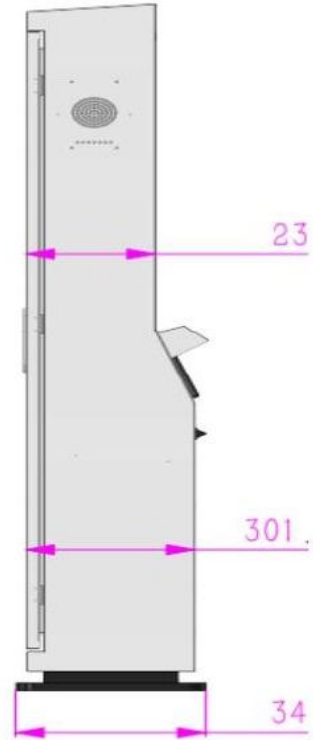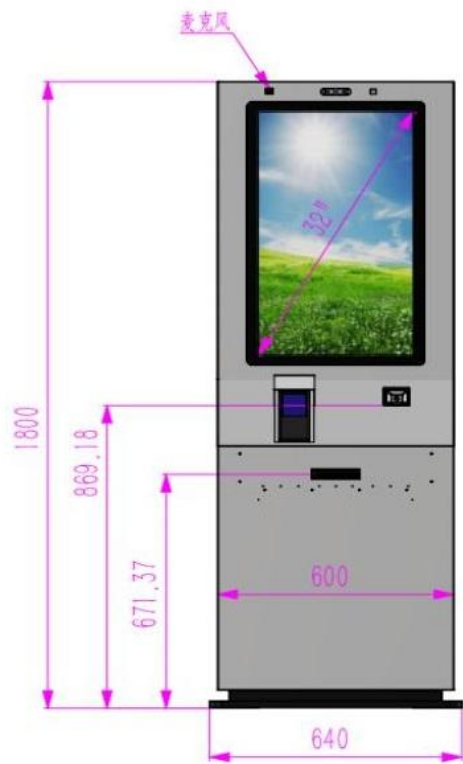

Self-service ordering machine

SP-215



Android 11 windows Printer Scan code



- 1. The configuration is flexible, and the configuration can be changed according to customer needs;
- 2. The horizontal screen/vertical screen can be switched freely; the up and down angle of the screen can be adjusted
- 3, optional size: 18.5/21.5;
- 4. Flexible installation, can be installed on the desktop or on the floor (plus a floor column);
- 5. OEM is available, and the appearance and color can be customized according to customer needs



Specification

SPECIFICATIONS

Parameter

Size	21.5 inch BOE original brand new screen
Resolution	1920*1080
Touch screen	Ten point capacitive touch screen
Printer	80mm automatic paper cutting receipt printer
Scanner	1D & 2D High Performance Barcode Scanner
POS stand	Standard bracket OR according to customer POS machine design

Computer

OS	Windows
CPU	I5-4 generation I3-4 generation
RAM	4G
ROM	64G
OS	Android 11/7 (optional)
CPU	RK3288 RK3568
RAM	2G
ROM	16G

Optional

NFC	13.56MHz non-contact
Camera	Binocular/Monocular
Floor column	Humanized segmented floor column design, according to different height requirements, the number of columns can be selected, the default height is 85cm, and each increase or decrease is 15cm

Accessories

Power supply	DC:12V-8AAC:110V-220V
Package size	45.5*45*88 (CM)
Machine weight	22.11KG
Column weight	8.43KG



HF302

Wireless Queue Call System Machine

HF302



windows




Printer

Please go to window 4 at 10068
Please go to window 4 at 10069

Optional



Optional

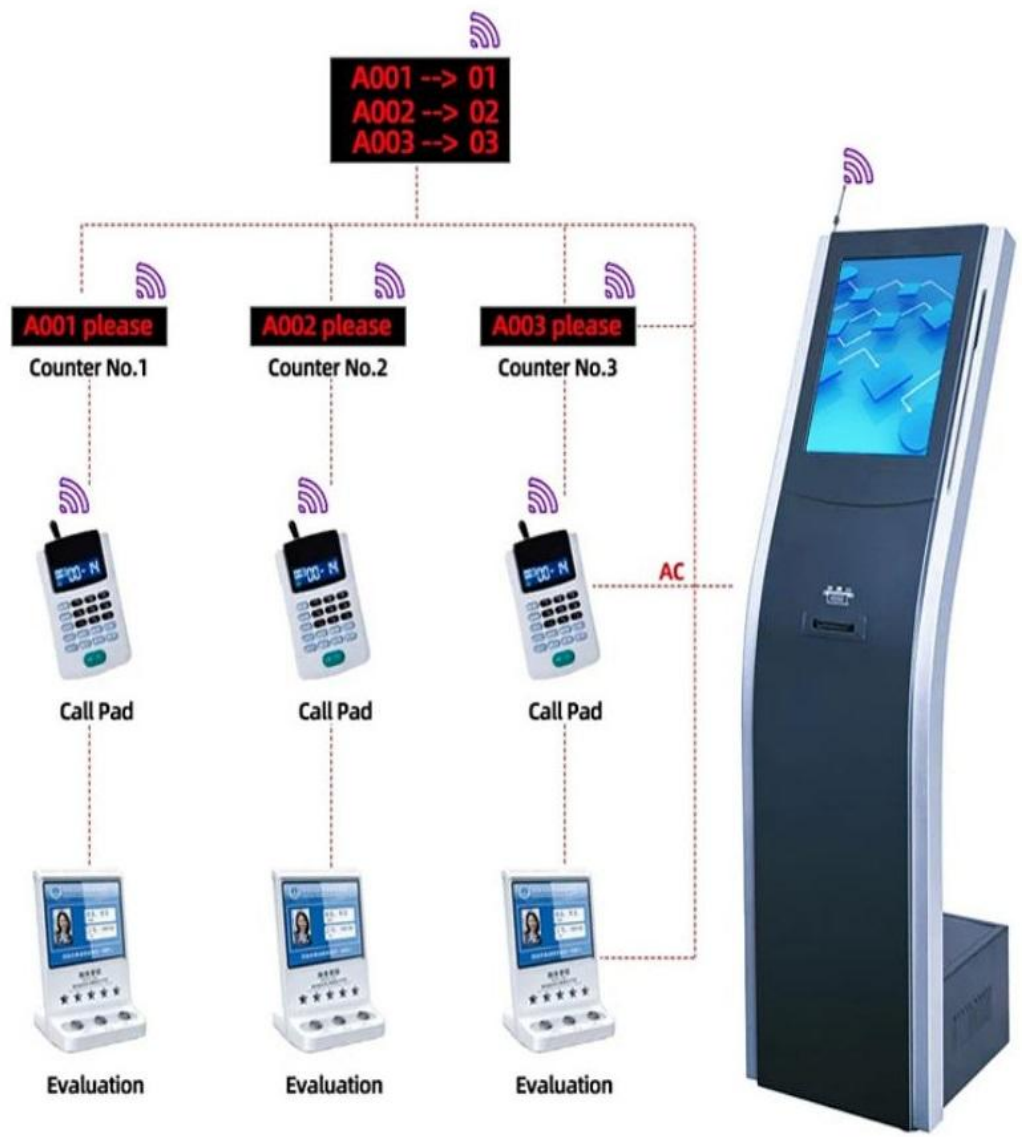

SPECIFICATIONS

Parameter

Size	15.6-inch LCD screen
Resolution	1280 * 1024
Aspect ratio	16:9
wireless	Receive and send wireless signals, reliable communication distance 30-60M.
Interface	USB
Printer	80mm thermal printer
Speaker	Equipped with power amplifier and sound system, it can provide prompt sounds in various sound formats
Contact point	Infrared touch screen, single touch life 60 million times



Optional

NFC	support
Camera	support
Integrated screen	support
Call Pad	support

Computer

OS	XP/Windows
CPU	Dual core 1.8G
RAM	2G
ROM	32G



Bank



Hospital



Taxation



Immigration Service